

Backhouse et al.


Method and Apparatus for a Configurable JSP Processing Framework

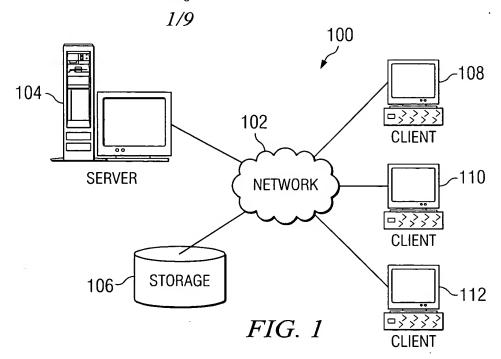


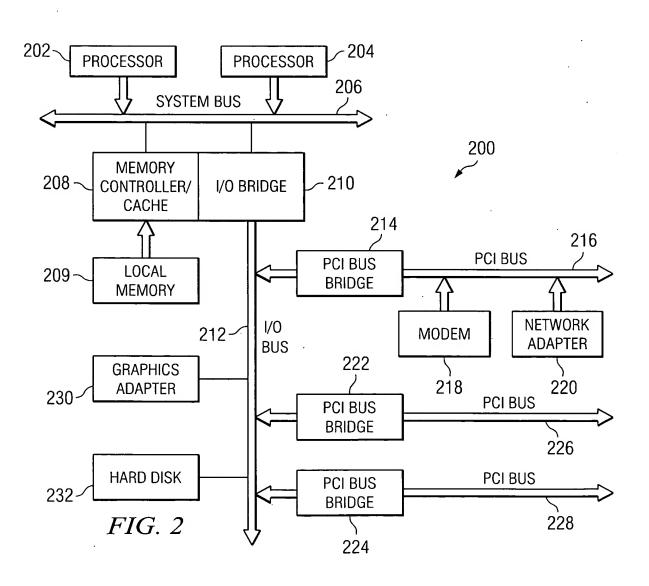

Backhouse et al.


Method and Apparatus for a Configurable JSP Processing Framework

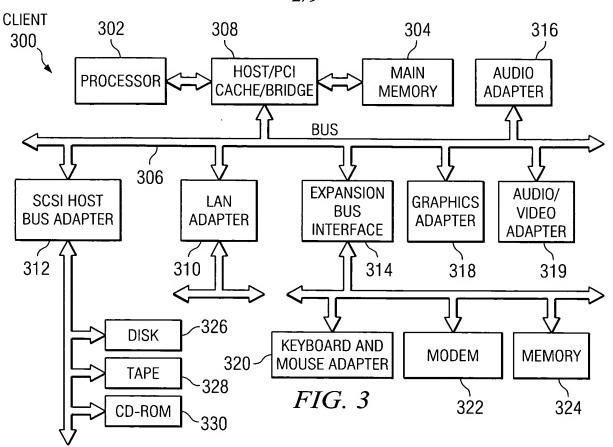


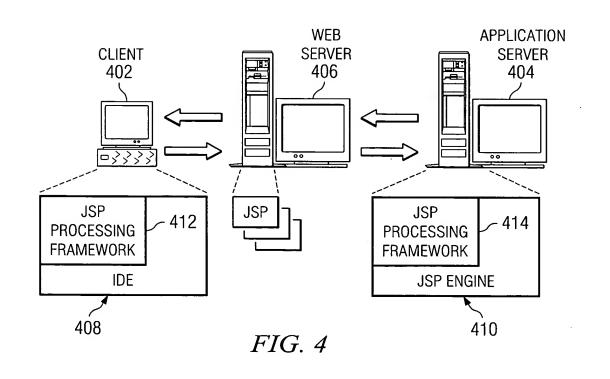

Backhouse et al.

Method and Apparatus for a Configurable JSP Processing Framework

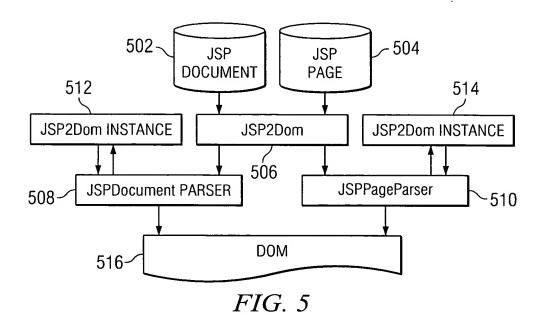

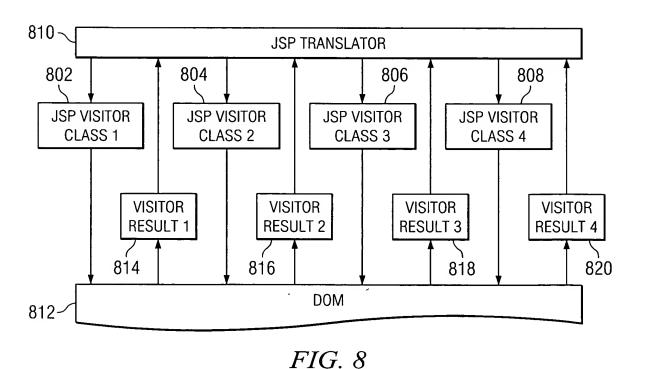

Backhouse et al.

Method and Apparatus for a Configurable JSP Processing Framework

4/9

JSP VISITOR

```
CONFIGURATION
                                                                    SCHEMA
                                                                      602
<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <xsd:annotation>
    <xsd:documentation xml:lang="en">
      Jsp Visitor Collection schema.
    </xsd:documentation>
  </xsd:annotation>
  <xsd:element name = "jsp-visitor-configuration">
    <xsd:complexType>
                                        604
      <xsd:sequence>
        <xsd:element ref="jsp-visitor-definition" minOccurs="0" maxOccurs="unbounded"/>
      </xsd:sequence>
                                         606
      <xsd:sequence>
        <xsd:element ref="jsp-visitor-collection" minOccurs="0" maxOccurs="unbounded"/>
      </xsd:sequence>
    </xsd:complexType>
  </xsd:element>
  <xsd:element name="jsp-visitor-definition" type="jsp-visitor-definitionType"/>
  <xsd:complexType name="jsp-visitor-definitionType">
                                \sim 608
    <xsd:sequence>
      <xsd:element name="class-name" type="xsd:string"/>
      <xsd:element name="result-type" type="xsd:string"/>
    </xsd:sequence>
                                \sim 610
    <xsd:attribute name="id" type="xsd:string"/>
  </xsd:complexType>
                          \sim 612
  <xsd:element name="jsp-visitor-collection" type="jsp-visitor-collectionType"/>
  <xsd:complexType name="jsp-visitor-collectionType">
    <xsd:sequence>
      <xsd:element ref="jsp-visitor" minOccurs="0" maxOccurs="unbounded"/>
    </xsd:sequence>
    <xsd:attribute name="id" type="xsd:string"/> __620
  </xsd:complexType>
  <xsd:element name="jsp-visitor" type="jsp-visitorType"/>
  <xsd:complexType name="jsp-visitorType">
    <xsd:attribute name="id" type="xsd:string"/> \sqrt{614}
    <xsd:attribute name="order" type="xsd:int"/> 616
    <xsd:attribute name="visits" type="xsd:int"/> 618
  </xsd:complexType>
</xsd:schema>
                                      FIG. 6
```


Backhouse et al.

Method and Apparatus for a Configurable JSP Processing Framework

```
5/9
<?xml version="1.0" encoding-"UTF-8"?>
<jsp-visitor-configuration xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"</p>
                xsi:schemaLocation="http://www.ibm.com/xml/ns/JspVisitorConfiguration.xsd">
<jsp-visitor-definition id="JspValidate"> ~ 704
    <class-name>com.ibm.ws.jsp.translator.visitor.validator.ValidateJspVisitor</class-name> __718
    <result-type>com.ibm.ws.jsp.translator.visitor.validator.ValidateJspResult</result-type> ~720
</isp-visitor-definition>
<jsp-visitor-definition id="JspGenerate"> \to 706
    <class-name>com.ibm.ws.jsp.translator.visitor.generator.GenerateJspVisitor</class-name>
    <result-type>com.ibm.ws.jsp.translator.visitor.generator.GenerateJspResult</result-type>
</isp-visitor-definition>
<jsp-visitor-definition id="TagFileDependencyCheck"> \square 708
    <class-name>com.ibm.ws.jsp.translator.visitor.tagfiledep.TagFileDependencyVisitor</class-name>
    <result-type>com.ibm.ws.jsp.translator.visitor.tagfiledep.TagFileDependencyResult</result-type>
</isp-visitor-definition>
<jsp-visitor-definition id="TagFileScan">\sqrt{710}
<class-name>com.ibm.ws.jsp.translator.visitor.tagfilescan.TagFileScanVisitor</class-name>
<result-type>com.ibm.ws.jsp.translator.visitor.tagfilescan.TagFileScanResult</result-type>
</isp-visitor-definition>
<jsp-visitor-definition id="TagFileValidate"> \sqrt{712}
    <class-name>com.ibm.ws.jsp.translator.visitor.validator.ValidateTagFileVisitor</class-name>
    <result-type>com.ibm.ws.jsp.translator.visitor.validator.ValidateTagFileResult</result-type>
</isp-visitor-definition>
<jsp-visitor-definition id="TagFileGenerate">\sum 714
    <class-name>com.ibm.ws.jsp.translator.visitor.generator.GenerateTagFileVisitor</class-name>
    <result-type>com.ibm.ws.jsp.translator.visitor.generator.GenerateTagFileResult</result-type>
</isp-visitor-definition>
<jsp-visitor-definition id="Smap"> \sim 716
    <class-name>com.ibm.ws.jsp.translator.visitor.smap.SmapVisitor</class-name>
    <result-type>com.ibm.ws.jsp.translator.visitor.smap.SmapVisitorResult</result-type>
</jsp-visitor-definition>
<jsp-visitor-collection id="JspTranslation">>722
    c | Sp-visitor id="TagFileDependencyCheck" order="1" visits="1"/> \square 732
    <isp-visitor id="JspValidate" order="2" visits="1"/> ~ 734
    <jsp-visitor id="JspGenerate" order="3" visits="7"/>
736
</isp-visitor-collection>
<jsp-visitor-collection id="DebugJspTranslation"> \sqrt{724}
    <jsp-visitor id="TagFileDependencyCheck" order="1" visits="1"/>
    <jsp-visitor id="JspValidate" order="2" visits="1"/>
    <jsp-visitor id="JspGenerate" order="3" visits="7"/>
    <isp-visitor id="Smap" order="4" visits="1"/>
</isp-visitor-collection>
<jsp-visitor-collection id="TagFileTranslation">\sim726
    <isp-visitor id="TagFileValidate" order="1" visits="1"/>
                                                                           JSP VISITOR
    <jsp-visitor id="TagFileGenerate" order="2" visits="7"/>
                                                                         CONFIGURATION
</isp-visitor-collection>
<jsp-visitor-collection id="DebugTagFileTranslation">>728
                                                                               FILE
    <jsp-visitor id="TagFileValidate" order="1" visits="1"/>
                                                                           FIG. 7
    <jsp-visitor id="TagFileGenerate" order="2" visits="7"/>
    <jsp-visitor id="Smap" order="3" visits="1"/>
</isp-visitor-collection>
<jsp-visitor-collection id="TagFileDependency">\sim730
    <isp-visitor id="TagFileDependencyCheck" order="1" visits="1"/>
</isp-visitor-collection>
</jsp-visitor-configuration>
```

Backhouse et al.

Method and Apparatus for a Configurable JSP Processing Framework

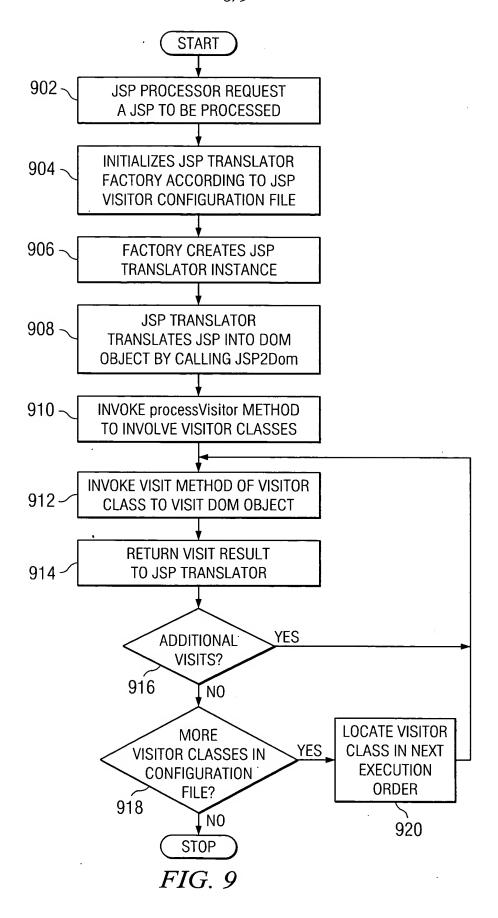

Backhouse et al.

Method and Apparatus for a Configurable JSP Processing Framework

```
ValidateJSPVisitor
                                                                            PROGRAM
                                                                               1002
                             1004
                                                   1006
      protected void visitJspOutputStart (Element jspElement) throws JspCoreException {
          if (!jspConfiguration.isXml()) {
            throw new JspTranslationException(jspElement, "jsp.error.jspoutput.xml.only");
1008 validateAttributes(jspElement, outputAttrNames); 1010
          if (jspElement.hasChildNodes()) {
            throw new JspTranslationException(jspElement, "jsp.error.output.has.body");
          }
          Attr docTypeRootElement = jspElement.getAttributeNode("doctype-root-element");
          Attr docTypeSystem = jspElement.getAttributeNode("doctype-system");
          Attr docTypePublic = jspElement.getAttributeNode("doctype-public");
1014 \sim \text{if (doctypeSystem == null) } \{
            if (docTypeRootElement! = null) {
              throw new JspTranslationException(jspElement, "jsp.error.no.doctype-system.attr");
  1016 / if (docTypePublic!=null) {
              throw new JspTranslationException(jspElement, "jsp.error.no.doctype-system.attr");
          }
          else {
  1012 / if (docTypeRootElement == null) {
              throw new JspTranslationException(jspElement, "jsp.error.no.doctype-root-element.attr");
          }
      }
                                              FIG. 10A
```

Backhouse et al.

Method and Apparatus for a Configurable JSP Processing Framework

```
ValidateTagFileVisitor
                                                                             PROGRAM
                                                                               1020
                       1022
                                                        1024
      protected void visitJspDoBodyStart (Element jspElement) throws JspCoreException {
1026 List specifiedStandardActionAttrs = getAttributeList(jspElement);
1030 validateAttributes(specifiedStandardActionAttrs, jspElement, doBodyAttrNames); 1028
          validateEmptyBody(ispElement):
          Attr varAttr = jspElement.getAttributeNode("var");
          Attr varReaderAttr = jspElement.getAttributeNode("varReader");
          if (varAttr!= null && varReaderAttr!= null) {
              throw new JspTranslationException(jspElement, "jsp.error.TagFile.dobody.var_varreader");
          }
          if (jspElement.hasAttribute("scope")) {
              if (jspElement.hasAttribute("var") == false &&
      jspElement.hasAttribute("varReader") == false) {
                  throw new JspTranslationException(jspElement,
      "jsp.error.tagfile.dobody.scope var varreader");
              }
          }
1032 \\ \frown \text{Attr scopeAttr} = \text{jspElement.getAttributeNode("scope");}
          if (scopeAttr!= null) {
              boolean valid = false;
    1034 if (scopeAttr.getValue().equals("page")) {
                  valid = true:
             - else if (scopeAttr.getValue().equals("request")) {
                  valid = true;
             - else if (scopeAttr.getValue().equals("session")) {
                  valid = true;
             - else if (scopeAttr.getValue().equals("application")) {
                  valid = true;
              if (valid == false) {
                  throw new JspTranslationException(jspElement, "jsp.error.tagfile.dobody.scope invalid");
          }
      }
```

Backhouse et al.

Method and Apparatus for a Configurable JSP Processing Framework

